IMPORTANT

Read all instructions before assembling.

WARNING: To avoid damages, assemble the product on a soft, clean surface.

CAUTION: Keep small parts out of reach of children.

Before assembly, remove all parts and part packages from carton. If anything is missing or damaged, please contact the retailer from which the product was purchased or contact customer service, 800–613–3261. ANY QUESTIONS CALL: 800-613-3261 M-F 8:00AM-6:00PM ET


157–087 Paros Console Table

PACKAGE CONTENTS

Parts		Quantity
А	HEX BOLT – 2.5"	4
В	HEX BOLT – 2"	4
С	WASHER	8
D	HEX WRENCH	1
E	TABLE TOP	1
F	TABLE LEG	1
G	TABLE LEG	2

NOTES:

One-person assembly. Approx. assembly time: 25 minutes

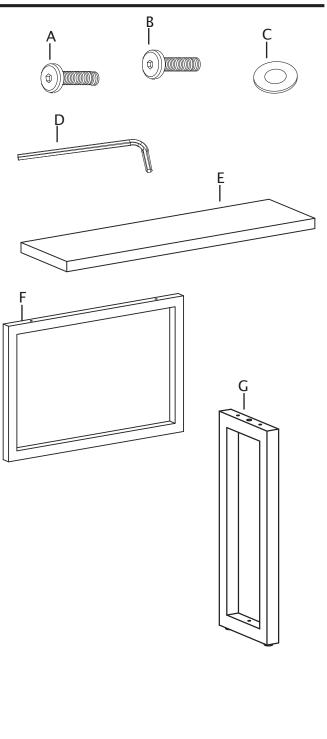


157-087 Paros Console Table

ASSEMBLY

IMPORTANT: It is recommended to place a blanket, cardboard or other cushioning material on the floor to prevent damage to floor and furniture piece.


- 1. Hold table leg (F) and one table leg (G) upright.
- 2. Slide end of table leg (F) through opening in table leg (G).
- 3. Align hole in top of table leg (G) with hole in top of table leg (F).
- Slip washer (C) over end of one hex bolt (A). Using hex wrench (D), thread hex bolt (A) with washer (C) down into hole in top of table leg (G) and into hole in top of table leg (F). DO NOT completely tighten hex bolt (A).
- 5. Carefully place leg assembly on its side on the floor on top of cushioning material.
- Slip washer (C) over end of one hex bolt (A). Using hex wrench (D), thread hex bolt (A) with washer (C) up through hole in bottom of table leg (G) and into hole in bottom of table leg (F). DO NOT completely tighten hex bolt (A).
- 7. Raise leg assembly so leg assembly is upright on floor.
- 8. Repeat steps 2–6 to install second table leg (G) on other end of table leg (F).
- 9. Using hex wrench (D), completely tighten hex bolts (A) in top and bottom of leg assembly (F/G).

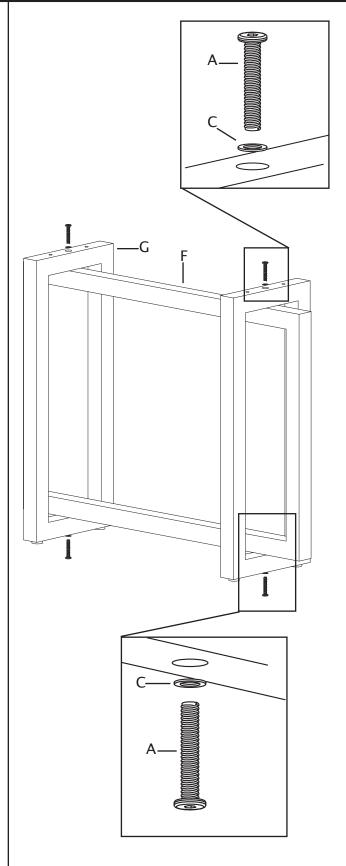

157-087 Paros Console Table

ASSEMBLY (CONTINUED)

- 10. Carefully place table top (E) face down on floor, on top of cushioning material.
- 11. Legs should be placed inside of supporting bar on underside of top as shown
- 12. Align holes in leg assembly (F/G) with holes in underside of table top (E).
- 13. Slip one washer (C) over end of each hex bolt(B). Using hex wrench (D), thread each hex bolt(B) with washer (C) into holes in leg assembly(F/G) and into holes in underside of table top (A).
- 14. After all hex bolts (B) are installed, using hex wrench (D), completely tighten hex bolts (B).

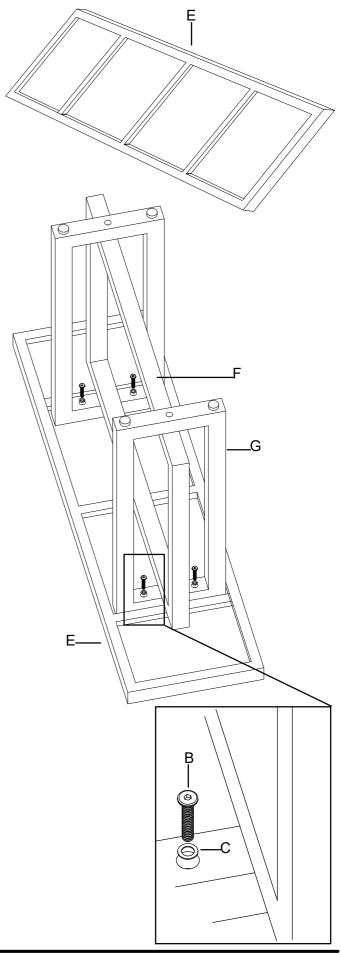

157-087 Paros Console Table

ASSEMBLY (CONTINUED)


15. Turn console table upright and place in permanent location.

IMPORTANT: During the life of the product, periodically check all screws and fixings to ensure they are secure.

CARE AND CLEANING

- Before using, wipe with a clean, dry cloth.
- Glass may be cleaned with cleaning products specified safe to use on glass.
- Dust and clean furniture with a clean, non-colored, lint-free cloth.
- Do not use any cleaners with chemicals, solvents or harsh abrasives.
- Do not put hot items directly on furniture surface.
- Do not place furniture in direct sunlight.
- Do not place furniture near heating or cooling vents.
- Do not write on furniture without a padded barrier to protect the surface.
- Do not place furniture outside. For indoor use only.
- Any liquid spilled on the table should be cleaned up immediately using a damp cloth.
- Avoid rubbing or scratching the surface with rough or abrasive objects.

PLEASE KEEP INSTRUCTIONS FOR FUTURE REFERENCE.

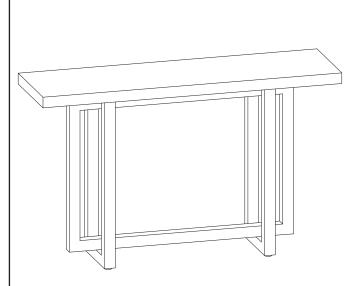

MADE IN VIETNAM