



190-3

ATTN:

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATIONS OF THE PRODUCT AND HAZARDS INVOLVED.

CAUTION: If you feel you do not have enough electrical wiring experience, we recommend that your fixture should be installed by a qualified licensed electrician.

Before starting the installation, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

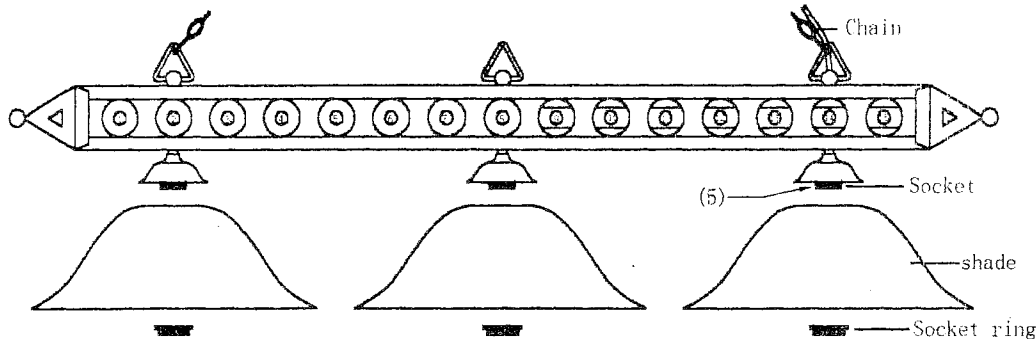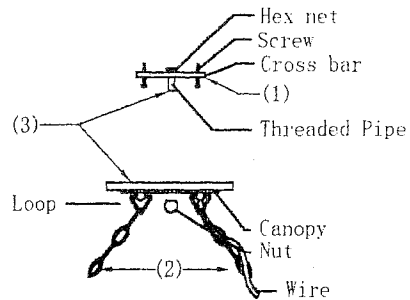

- 1) Installate cross bar to the ceiling.
- 2) Connect chain between canopy and bar. Determine length of chains needed for desired height from ceiling. Use chain or hand pliers to open, close and remove links accordingly.
- 3) Pull wires though loops in the ceiling canopy. Then attach chain to the loops. The wires should be taut to ensure that the chain, not the electrical wire supports the entire weight. Please consult a licensed electrician for connections.
- 4) Lift the ceiling canopy to the ceiling so that the threaded stud projects through the canopy and secure with the bottom knob.
- 5) Remove ring from threaded socket. Put shade through socket thread ring back onto socket tightly to secure shade.

UNDERWRITERS LABORATORIES

All fixtures are U.L. listed and labeled. We reserve the right to modify construction to coincide with U.L. requirements or due to raw material shortage.