
Each Norwell light fixture has a mounting bar or plate to secure it to the electrical junction box. No matter what type of mounting bar/plate your fixture uses, installation requires three basic steps.

- 1. Attach the mounting bar/plate to the electrical junction box.
- 2. Connect the electrical wires from the junction box to the electrical wires from the fixture. (Black to Smooth, White to Ribbed and Green to Ground).
- 3. Secure the fixture to the mounting bar/plate.

INSTALLATION OF FIXTURE

- 1. USE QUICK LINK TO CONNECT FIXTURE LOOP AND THE BOTTOM OF CHAIN.
- 2. LACE THE FIXTURE WIRES AND GROUND WIRES THROUGH THE CHAIN, THE TUBE AND THE CANOPY.
- 3. THREAD THE TUBE ONTO THE COUPLER OF THE CANOPY.
- 4. OPEN ONE LINK OF CHAIN, CONNECT IT TO LOOP OF THE CANOPY ASSEMBLY AND CLOSE THE LINK.
- 5. ATTACH THE MOUNTING PLATE TO JUNCTION BOX WITH 2 JUNCTION BOX SCREWS.
- 6. RAISE FIXTURE UP AND HOOK THE SUPPORTING CABLE TO MOUNTING PLATE.
- 7. CONNECT THE ELECTRICAL WIRES FROM YOUR JUNCTION BOX TO THE WIRES FROM THE CANOPY USING WIRE NUTS. (BLACK TO SMOOTH, WHITE TO RIBBED, GREEN TO GROUND)
- 8. RAISE THE CANOPY OVER THE MOUNTING PLATE AND THEN SECURE IT WITH MOUNTING SCREWS.
- 9. SLIP THE GLASS OVER THE SOCKET AND LINE UP THE HOLES ON IT WITH THE HOLES ON THE SOCKET. SECURE IT WITH THE WASHERS AND SCREWS.

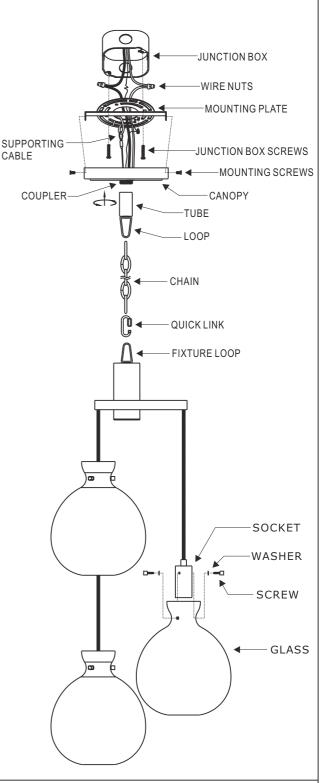

Norwell

Lighting

INSTRUCTIONS 4743

Be sure to read and understand all instruction sheets completely before beginning assembly or installation.

•Be sure the power is turned off by removing the fuse or closing the circuit breaker. •All assembly and installation work must be in accordance with National State and Local electrical codes. We strongly advise using a li

•All assembly and installation work must be in accordance with National, State and Local electrical codes. We strongly advise using a licensed electrician. •Be aware that the weight of some fixtures may exceed the strength rating of the 4" electrical junction box or other such hardware at your site. In all cases, it is the responsibility of

the contractor to properly secure the fixture to the structure, and to provide adequate support for the fixture.

•Due to constant production improvements, details of the design, material or finish may change in any way that will not significantly alter installed appearance or reduce function or performance. © Norwell Manufacturing Company Inc. - East Taunton, MA 02718 Tel: 508-977-9991 WWW.Norwellinc.com