


Be sure to read and understand all instruction sheets completely before beginning assembly or installation.

All assembly and installation work must be performed by qualified personnel, in accordance with all applicable national and local building and electrical codes.

Be aware that the weight of some fixtures may exceed the strength rating of the 4" electrical junction box or other such hardware at your site. In all cases, it is the responsibility of the contractor to properly secure the fixture to the structure, and to provide adequate support for the fixture.

Due to constant production improvements, details of the design, material or finish may change in any way that will not significantly alter installed appearance or reduce function or performance.

© East Taunton, MA D2718 (SD8) 977-9991

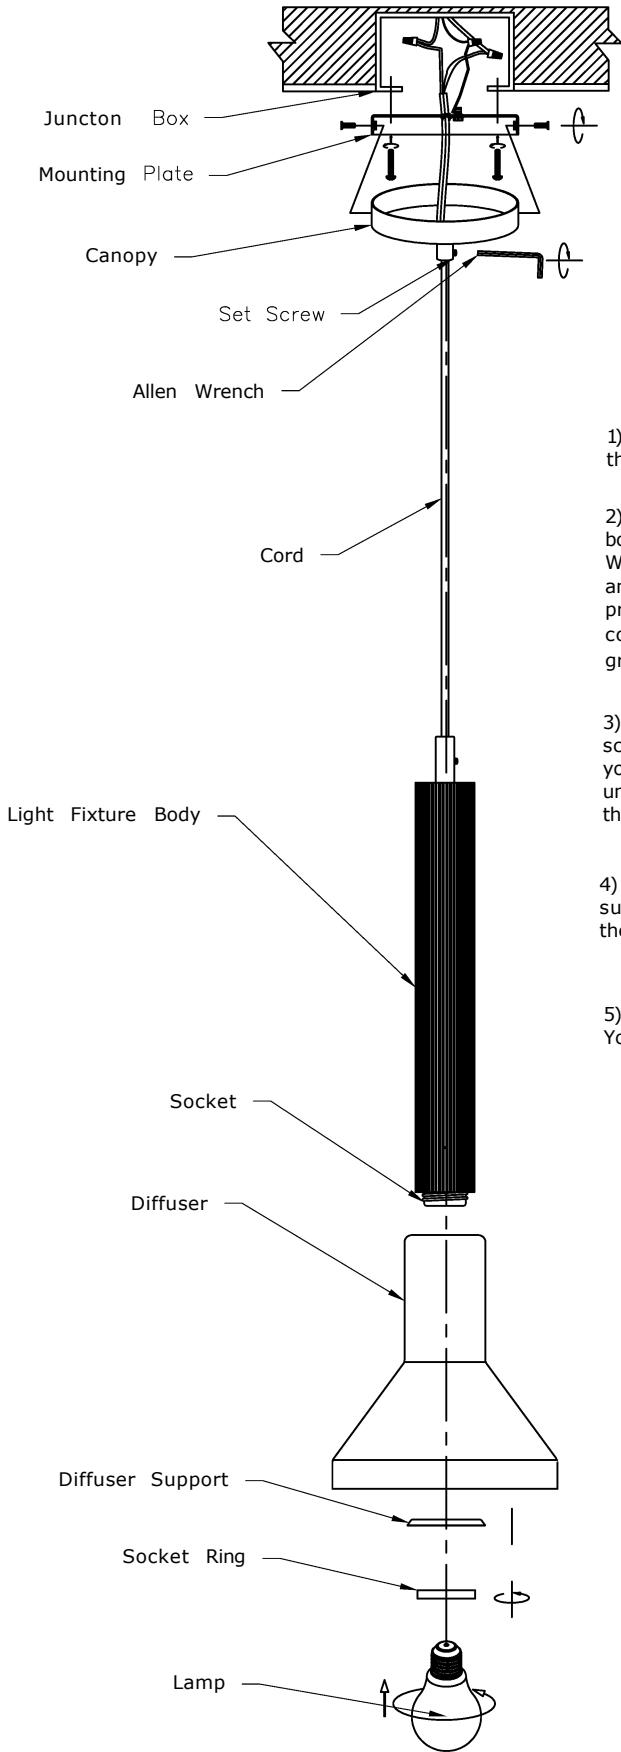

1) Turn the power off. Feed the cord through the canopy and the mounting plate centers. Wire the fixture.

2) Connect the light fixture wires to the wires in the junction box. Wire black or brown to line voltage, white or blue to neutral, and attach the green or bare wire to the green ground screw provided on the mounting plate. Use wire nuts on the connections and leave no bare wire exposed (excepting the green).

3) Attach the mounting plate to the junction box with the screws provided. Slide the canopy up the cord the distance you need for your drop. Tighten the set screw on the coupling until it holds the cord snug. Lift and screw the canopy up to the mounting plate and bolt together.

4) Slide the diffuser up from the bottom with the diffuser support and the socket ring. Thread the socket ring on to the socket to support the diffuser support and the diffuser.

5) Thread the lamp into the socket and turn the power on. You have finished the installation process.

Norwell Lighting

5386

REV.	BY	DATE	DESCRIPTION
INSTRUCTIONS			0 SHEET # 1 OF 1
5386-Funnel Cord			
DATE:	12/12/2019	DWG:	5386-A-INST