


Be sure to read and understand all instruction sheets completely before beginning assembly or installation. All assembly and installation work must be performed by qualified personnel, in accordance with all applicable national and local building and electrical codes. Be aware that the weight of some fixtures may exceed the strength rating of the 4" electrical junction box or other such hardware at your installation. It is the responsibility of the contractor to properly secure the fixture to the structure, and to provide adequate support for the fixture. Due to constant production improvements, details of the design, material or finish may change in any way that will not significantly alter installation or reduce function or performance.

© East Taunton, MA 02718 ET H BE1

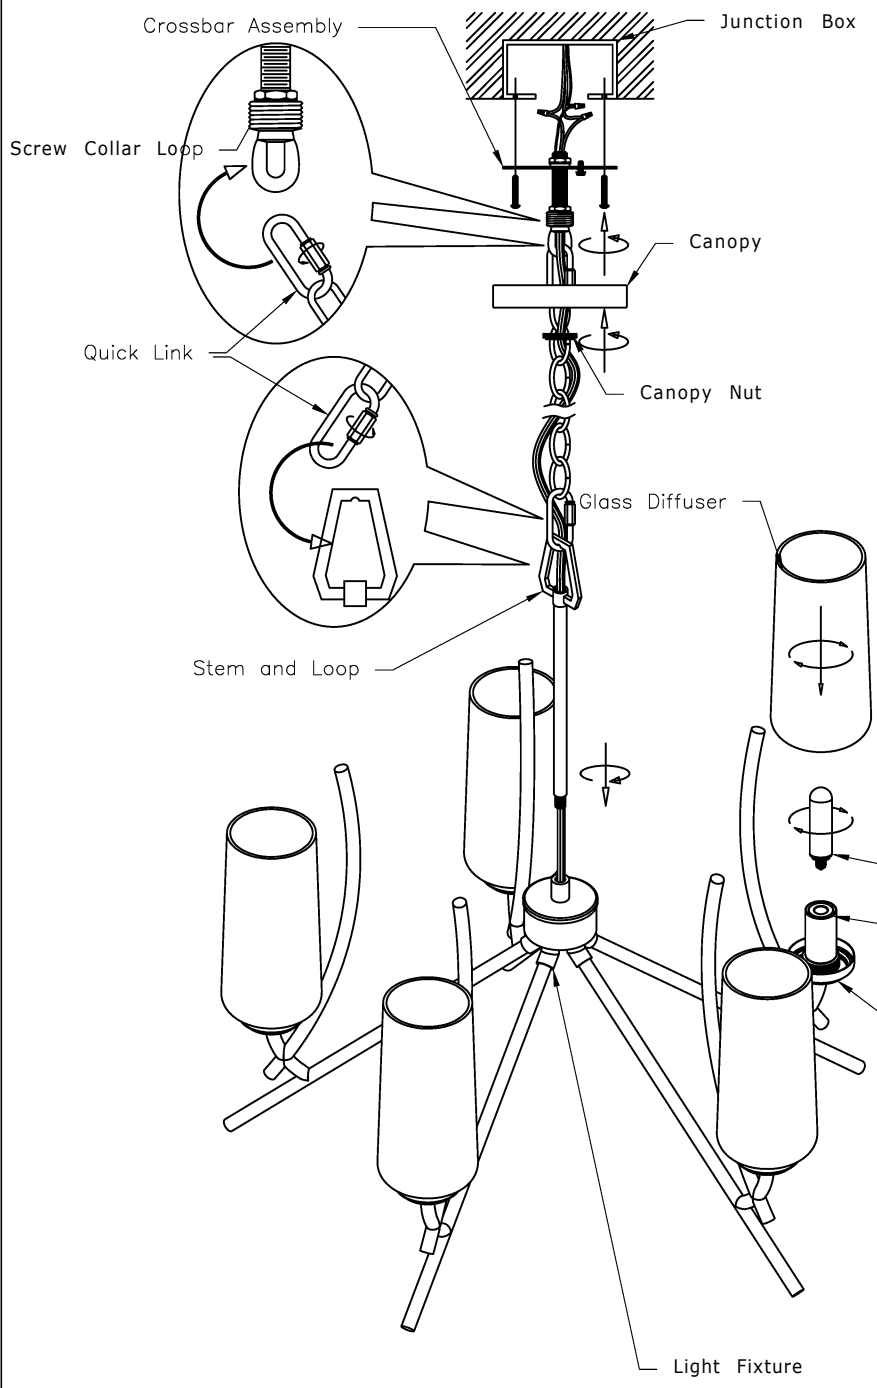

- 1) Screw the crossbar assembly to the junction box on the ceiling. Make sure it is tight.
- 2) Feed the wires from the light fixture through the stem and loop and thread the stem and loop into the light fixture.
- 3) Connect the chain to the stem and loop with the quick link. Weave the wire from the light fixture through the chain and slide the canopy nut and canopy down the chain as far as it will go.
- 4) Lift the light fixture up to the cross bar assembly and use the quick link to hang the light fixture from the screw collar loop on the cross bar assembly. Close the quick link and feed the wire from the light fixture through the screw collar loop hole and through the nipple into the junction box.
- 5) Pull the light fixture and junction box wires out of the junction box on the side of the cross bar assembly. Connect the light fixture wires to the wires in the junction box. Wire black or brown to line voltage, white or blue to neutral, and attach the green or bare wire to the green ground screw provided on the mounting plate. Use wire nuts on the connections and leave no bare wire exposed (excepting the green). Tuck the wires inside the junction box.
- 5) Slide the canopy and canopy nut up to the ceiling and thread the nut onto the screw collar loop so it holds the canopy tight to the ceiling.
- 6) Screw in the lamps (provided by others). Thread the glass diffuser into the socket cups. Turn the power back on and you have completed the installation process.

Norwell Lighting

REV.	BY	DATE	DESCRIPTION
INSTRUCTIONS			BY: GB SHEET #: SHEET 1 OF 1
8154-Tulip Chandelier (5)			FILENAME:
DATE:	12/3/2019	DWG.:	8154-A-INST
8154-TULIP CHANDELIER (5)			