

Ava Sconce (Lena)

24", 36", 48"

9740
9741
9742

Project Name _____


Fixture Type _____

Quantity _____

Norwell | Lighting

I L E X

Custom Metalcraft


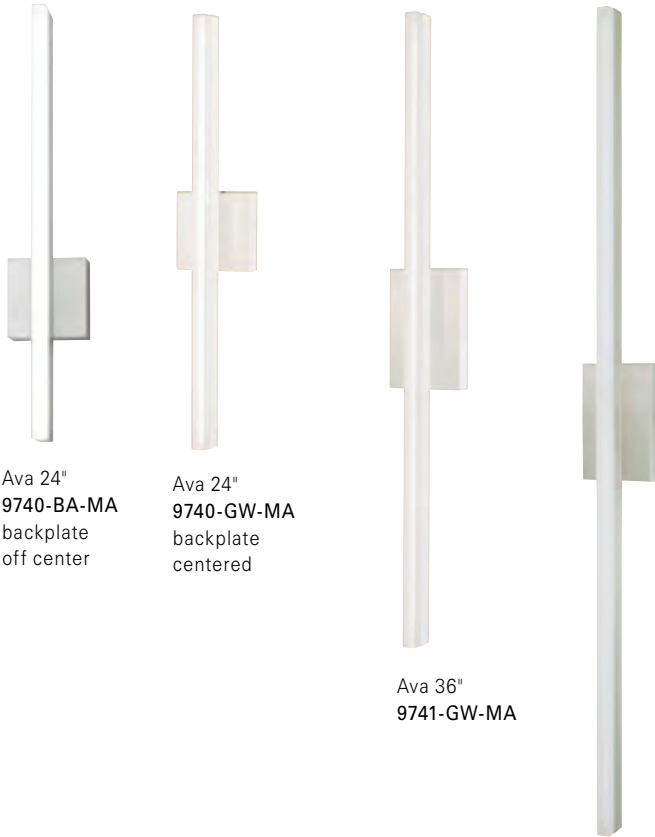


Ava 24"
9740-BA-MA
backplate
off center




Ava 24"
9740-GW-MA
backplate
centered

Ava 36"
9741-GW-MA

Ava 48"
9742-BA-MA

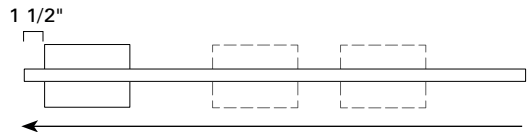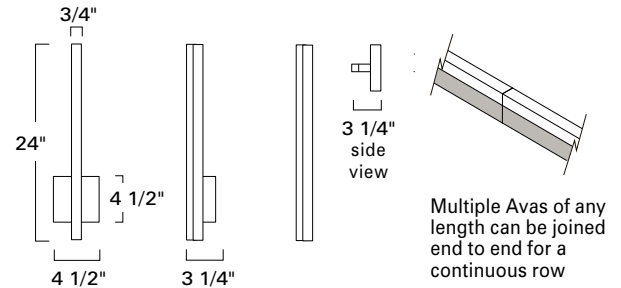

Slide the back plate along the length of the Ava body. AWAY FROM the direction of the LED Driver Bracket. Do not slide in the other direction, as this will cause interference with the LED wires.

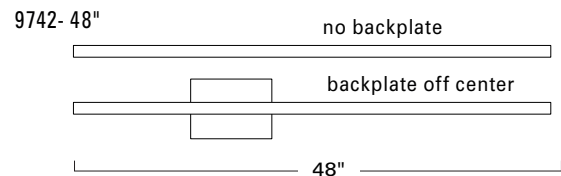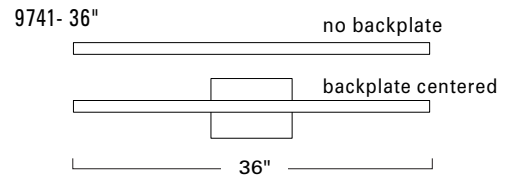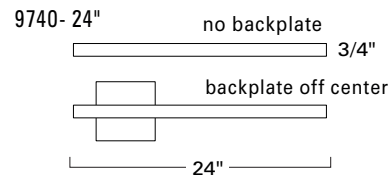

ADA LED

| Product Name / Model / Dimensions | Finish Options | Glass Options | Lamping Options | | | | | | | | | | | | |
|---|--|--|--|-----|---------|----------------|-------|----|--|-------|----|--|-------|----|--|
| Ava 24" - 9740 Ava 36" - 9741 Ava 48" - 9742 | Standard Brushed Aluminum / BA Gloss White / GW | Standard Matte Opal Acrylic / MA | Standard LED / LED | | | | | | | | | | | | |
| | | | <table border="1"> <thead> <tr> <th>SKU</th> <th>Wattage</th> <th>Integrated LED</th> </tr> </thead> <tbody> <tr> <td>9740*</td> <td>16</td> <td>1170 lumens, 3000K, 85 CRI, Triac, ELV and 0-10VDC dimming</td> </tr> <tr> <td>9741*</td> <td>25</td> <td>1900 lumens, 3000K, 85 CRI, Triac, ELV and 0-10VDC dimming</td> </tr> <tr> <td>9742*</td> <td>34</td> <td>2560 lumens, 3000K, 85 CRI, Triac, ELV and 0-10VDC dimming</td> </tr> </tbody> </table> | SKU | Wattage | Integrated LED | 9740* | 16 | 1170 lumens, 3000K, 85 CRI, Triac, ELV and 0-10VDC dimming | 9741* | 25 | 1900 lumens, 3000K, 85 CRI, Triac, ELV and 0-10VDC dimming | 9742* | 34 | 2560 lumens, 3000K, 85 CRI, Triac, ELV and 0-10VDC dimming |
| SKU | Wattage | Integrated LED | | | | | | | | | | | | | |
| 9740* | 16 | 1170 lumens, 3000K, 85 CRI, Triac, ELV and 0-10VDC dimming | | | | | | | | | | | | | |
| 9741* | 25 | 1900 lumens, 3000K, 85 CRI, Triac, ELV and 0-10VDC dimming | | | | | | | | | | | | | |
| 9742* | 34 | 2560 lumens, 3000K, 85 CRI, Triac, ELV and 0-10VDC dimming | | | | | | | | | | | | | |
| Product width with backplate 4.50" Backplate 24" - 4.50" H x 4.50" W Backplate 36", 48" - 7.00" H x 4.50" W | | | * universal driver accommodates both 120 - 277v | | | | | | | | | | | | |

UL/ETL Listed, Damp Location Rated

2-2021

DISCLAIMER:

Norwell Lighting and its companies, ILEX Architectural Lighting and Custom Metalcraft reserve the right to change specifications related to its product at anytime. USA Made indicates product is manufactured in East Taunton, Massachusetts facility. Phone: 508-823-1751