

# Norwell

Lighting and Accessories

## Installation Instructions

Chancellor single and double wall sconce


**CAUTION:** Be sure the power is turned off by either removing the fuse or closing the circuit breaker. Installation must be in compliance with National, State and Local electrical codes. We strongly advise using a licensed electrician.

### A. Attaching the Mounting Bar/Plate

1. Carefully unpack your new fixture and lay all parts on a clean surface.  
Be careful not to lose any small parts necessary for the installation.
2. Pull the electrical wires part way out of the junction box for easier access.
3. Attach your light fixture's mounting plate to the electrical junction-box (fig. A)

### B. Connecting the Electrical Wires & Main Back Plate

1. Connect the light fixture wires to the wires from the junction box as shown (fig. B) white to white, black to black and ground to ground. If there is no ground wire from the junction box, connect the fixture ground wire (green or copper) to the mounting bar with the green screw provided. Be certain that all connections are tight and NO bare wire is visible. (note: ground wire will show bare wire.)
2. Tuck the joined wires and wire nuts into the junction box. Secure the Main Back Plate to the mounting plate using the 2 mounting screws. One on top and one on bottom (fig. A)

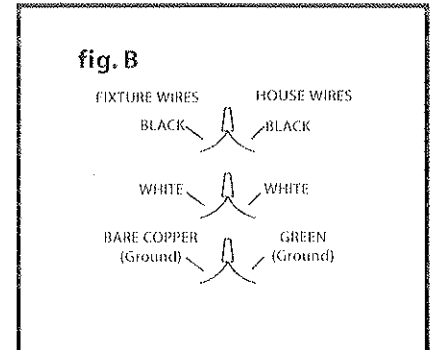

### C. Attaching the Glass Shade

1. Carefully unpack the glass shade
2. Locate the glass into the socket cup and use the screw collar provided to tighten the glass on the socket
3. Install lamp. Make sure proper wattage is used. (lamp not included)

fig. A

